



REVISION: B3

Product Overview

Surface mount LED downlight fitting with stalk. Features free rotation and tilt. Stalk can be configured in a number of lengths from a short 80mm to the longest 350mm.

The UFO LPV2 fitting features a sleek design and 360° rotation with 90° + 45° articulation in the pivot.

Available in a choice of colour temperatures with high color rendition and a selection of optics, the fitting can be used to provide contemporary, functional lighting in any environment.

Technical Information

Color Temperatures & Typical CRI Values	3000K – 96CRI 4000K – 95CRI
Power Consumption	1.6W per fitting, not inc. driver
Voltage	3.2V nominal @500mA
Driver Options	No dimming 0-10 dimming Local dimming Remote dimming
Lumens per Watt	3000K – 51lm/W 4000K – 54lm/W
Lens Options	16° / 23° / 36° / 61°
LED Life	50,000 hours
Material	Aluminium
Finish	Black, silver, white or custom powder coat



The fitting has an inbuilt plug/socket and can be easily removed from its stalk.




Ordering Code Selector

MODEL TYPE	COLOR TEMP		OPTICS		FINISH		LENGTH	
UFO LPV2	3000°K	30	16°	16	Black	BL	80mm	80
					Silver	SV	100mm	100
	4000°K	40	23°	23	Custom	CU	150mm	150
							200mm	200
							250mm	250
		36°	36			300mm	300	
		61°	61			350mm	350	

UFO LPV2 [Color Temp] [CRI] [Optics] [Finish] [Length]
 e.g. UFO-LPV2-30-16-BL-80 Please state RAL code for custom color

Fittings per Driver

Using standard UFO Unidrive CC9 driver combined with the SPCC1 splitter unit, the maximum number of fittings that can be powered by one driver is 12. For other configurations please contact UFO for advice.

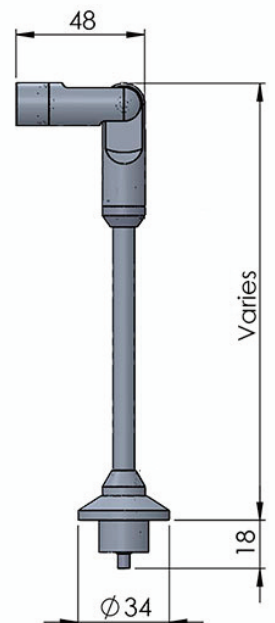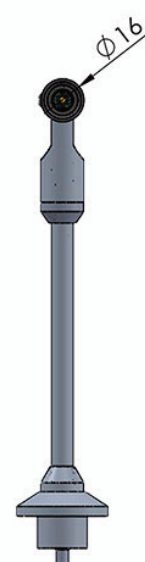

Drawing dimensions shown in mm.

